


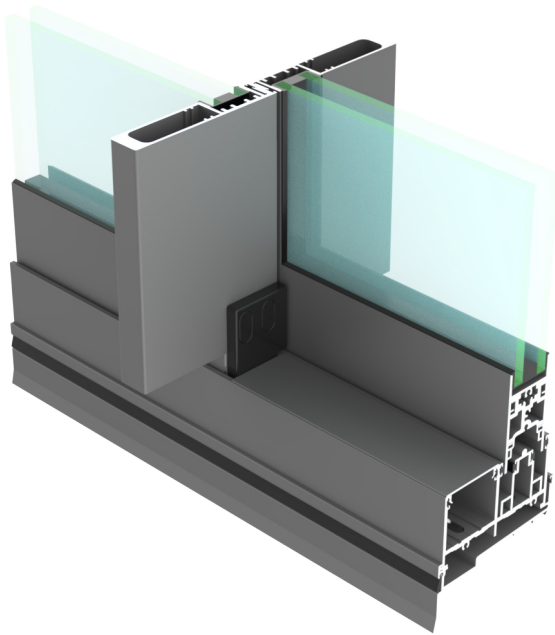

Key Features

- The UltraEDGE™ Sliding Door redefines the geometry of large-scale sliding systems. Developed by AWS to embody the essence of architectural precision, it delivers a seamless convergence of strength, proportion, and minimalist detailing.
- Ultra-slim 24 mm meeting stiles / interlocks create an elegant vertical profile, offering minimal visual interruption across large glazed spans.
- Panels will accept glass up to 32mm to enable the use of high performance glazing options, and can accommodate both single and double glazing.
- Large scale capability with engineered panels sizes up to 3300mm high and 2500mm wide with panels weights up to 300kg.
- Replaceable tracks, accessible drainage channels, and serviceable rollers ensure enduring operation and ease of maintenance throughout the product's life cycle.
- The 704B refines the UltraEDGE™ platform with a design focused on serviceability, accessibility, and enduring performance. While maintaining the same structural geometry and aesthetics as the 704, it introduces replaceable running tracks and a sill design that aligns with Liveable Housing Design Guidelines and AS 1428 accessibility requirements.

GENERAL

Max Panel Height*

3300mm

Max Panel Width*

2500mm

Max Glass Thickness

32mm DG 14.76mm SG

Frame Depth

102mm, 150mm, 200mm

ENERGY

UW Range

2.3-4.2 Double Glazed 4.5-6.2 Single Glazed


SHGC Range

0.15-0.3.9 Double Glazed 0.22-0.66 Single Glazed


WEATHER

Maximum Water Penetration Resistance (Pa)

500 Pa.

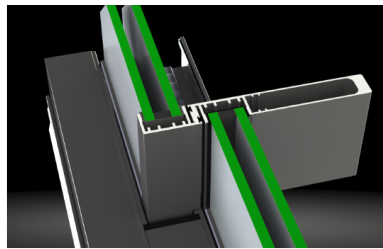


Ultra-slim 24mm interlocks are a standout feature of the 704FBR UltraEDGE™ sliding door, which includes single and double glazed options along with many combinations to meet your required wind loads.

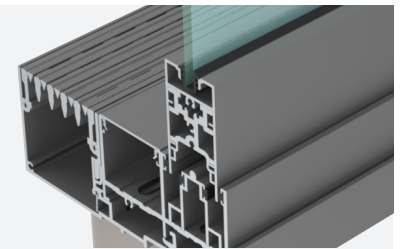


The Series 704B UltraEDGE™ sliding door system can be configured to comply with AS 1428.1 for access and mobility when installed with a rebated, level threshold and used in conjunction with an appropriate external drainage system



Meeting stiles feature a concealed custom mortice lock, combining secure operation with a refined, minimal visual outcome.

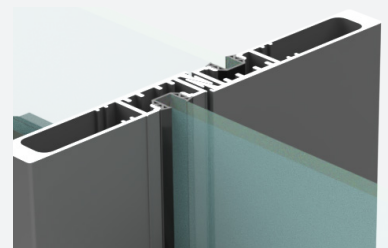

Accepts single and double glazing, allowing selection based on project performance requirements. (Single Glazing Shown)



*Dimensions subject to individual site conditions.