



# RESIDENTIAL AWNING/CASEMENT WINDOW

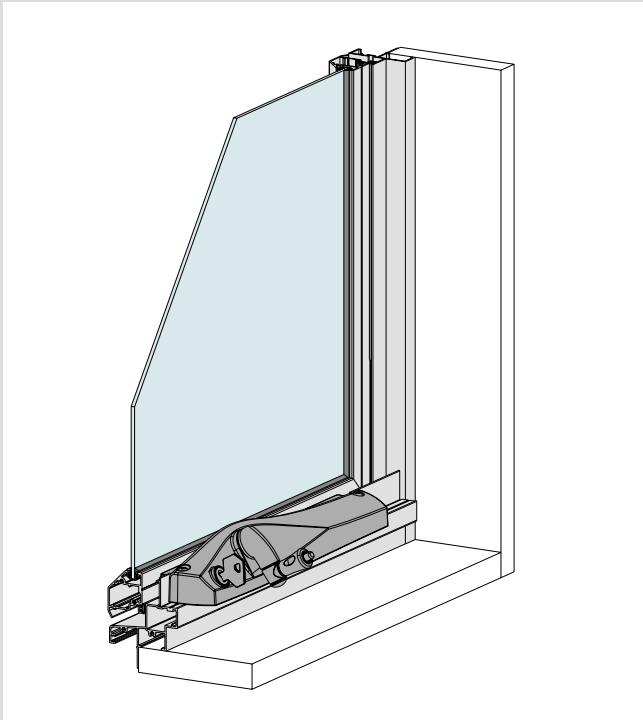


## KEY FEATURES


- 50mm frame high performance residential awning window.
- Continuous hinge hood protects sash from water intrusion. Water resistance rating of 450Pa allows this awning window to be used in most exposed residential locations in Australia.
- Awning type sashes are fitted with heavy duty chain winders.
- Casement type sash option available. These sashes are fitted with stainless steel friction stays and wedgeless cam handles.
- Adjoining fixed sidelights and/or lowlights have matching splayed glazing beads.
- Fixed sidelights and lowlights can be supplied with optional self-draining ball valve in the tubular sill that drains condensation water back to the outside while preventing blowbacks through the drainage hole.
- 102mm frame extender available.
- Moulded nylon sash corner guards designed to protect the exposed lower corners when the awning sash is in the open position.
- Custom co-extruded bulb seal for weather performance.




We offer an optional tall fixed sump sill with anti-blowback ball valve to take care of condensation.



We have several sashes to choose from, the illustration above shows our custom double glazed wrap around sash. This sash will accept 20mm Insulating Glass Units.



The standard chain winder used on the 516 comes standard with a stainless steel adjustable chain and a Polesium™ casing. These corrosion resisting features make the winder suitable for exposed locations.



The lower corners on awning sashes are protected with nylon wraparound guards. This reduces the chance of injury if someone walks into an open sash.

### GENERAL

**Max Frame Height\***  
Various

---

**Max Panel Width\***  
Various

---

### Max Glass Thickness

20mm

---

**Frame Depth**  
50mm

---

### ENERGY

**UW Range**  
2.1-6.5

---

**SHGC Range**  
0.17-0.75

---

### WEATHER

**Maximum Water**  
450 Pa.

---

### ACOUSTICS

**6.38mm Lam**  
Rw34 (-1;2)

---

**10.38mm Lam**  
STC36

---



\*Dimensions subject to individual site conditions.

BAL-40 compliance may limit glass options. Maximum glass size for BAL-40 products is 5m<sup>2</sup>.  
vantagealuminium.com.au/516