



Key Features

- A heavy duty custom sash and electronic hardware has been designed specifically for this Power STRUT Servery window.
- The sash opens and closes efficiently and quietly using plug and play electronic controls.
- The Power STRUT Servery can be fitted exclusively within both the 400 and 424 commercial framing.
- The sash is externally beaded for both single and double glazed applications and features zinc die cast corner spigots for safety and durability.
- The external bead allows for easy access if a future glass replacement is required.
- Single Glazed up to 10.38mm and Double Glazed up to 24mm.
- In a weather protected area, the window can be fabricated without the use of window sill framing for a seamless integration with a benchtop running through the opening.
- Unlike any other servery style windows, the unit is designed to open, close and securely lock itself unassisted.

GENERAL

Panel Height*

Min: 950mm Max: 1800mm

Panel Width*

Min: 600mm Max: 2400mm

Max Glass Thickness

10.38mm SG & 24mm DG

Frame Depth

102mm

ENERGY 50/52 Panels

UW Range

3.0-5.9

SHGC Range

0.14-0.61

WEATHER

Max Water

600 Pa.

Max SLS / ULS

1800Pa / 6000Pa

ACOUSTICS

Range

Rw21 thru Rw37


Rw data based on tests carried out on Series 50/52 door panels.




Stainless Steel componentry throughout the Power STRUT Window.



Self latching and locking mechanism for high security and convenience.

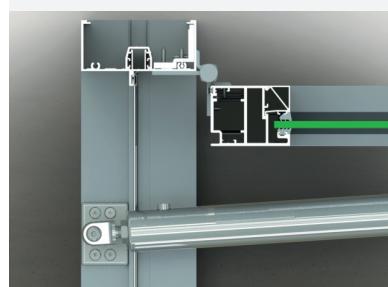

Hinges are secured to Heavy Duty backing plates to ensure the fixings longevity and safety.

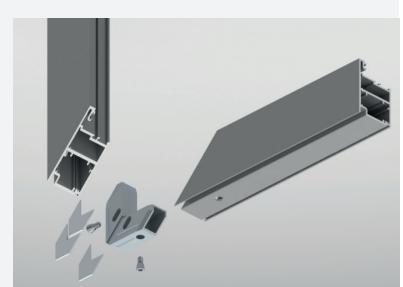

Dedicated metal spigots for superior strength and safety.



*Dimensions subject to individual site conditions including panel weights & sizes