

Key Features

- **Architectural Precision, Redefined** – The UltraEDGE™ system embodies disciplined, minimalist design, delivering architectural purity and high performance for cleaner, sharper façades without compromising durability.
- **Seamless Form and Function** – With top and bottom sash rails fully concealed within the frame, the system creates a smooth transition between glass and structure, reinforcing UltraEDGE™'s signature clean lines and elevating visual clarity.
- **Engineered for Australian Conditions** – A 500Pa water resistance rating and 7450Pa ± ultimate pressure capacity ensure dependable performance in harsh coastal regions, high-wind zones and other exposed environments.
- **Refined Minimalism** – Multiple interlock options, including an ultra-slim 15mm meeting stile which enhances the minimalist aesthetic while retaining the strength required for demanding commercial applications.
- **Adaptable Options** – Optional sash and mullions support a wide range of design wind loads, enabling the system to suit commercial, residential, and mixed-use projects with confidence.
- **Versatile Glazing Capability** – A wrap-around double-glazed sash accepts 20mm IGUs, while single-glazed options from 4mm to 10.38mm offer flexibility to optimise thermal performance, acoustics, and budget.

GENERAL

Max Panel Height*

1800mm

Max Panel Width*

2000mm

Max Glass Thickness

10.38mm **Single Glazed**-20mm **Double Glazed**

Frame Depth

102mm

ENERGY

UW Range

2.9-4.1

SHGC Range

0.17-0.59

WEATHER


Maximum Water

500 Pa.


ACOUSTICS

TBA


We anticipate future Acoustic testing will align with the existing results for Series 753 ComfortEDGE.

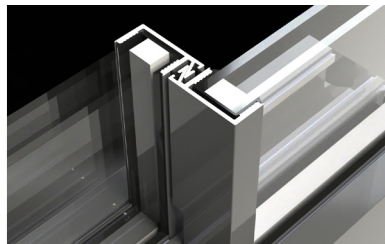


Ultra-slim 15mm interlocks are a standout feature of the 472 UltraEDGE™ sliding window, which includes single and double glazed options along with many combinations to meet your required wind loads.

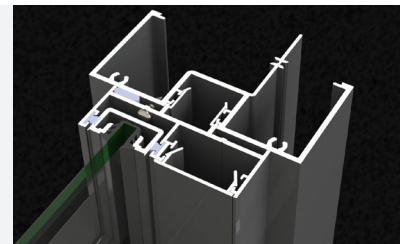


Snap-in jamb adaptors make it compatible to a range of commercial framing suites whilst maintaining concealed sashes embedded into the jams.

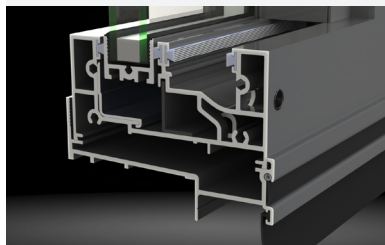

Various sill options for many configurations and applications such as multi-sliding, all sliding and flyscreening provisions.

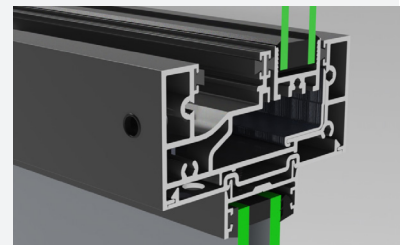

Transoms also maintain the minimal appearance whilst not sacrificing performance or adaptability.



*Dimensions subject to individual site conditions.