



COMMERCIAL SERIES | SERIES 642
COMMERCIAL SLIDING DOOR (150MM)

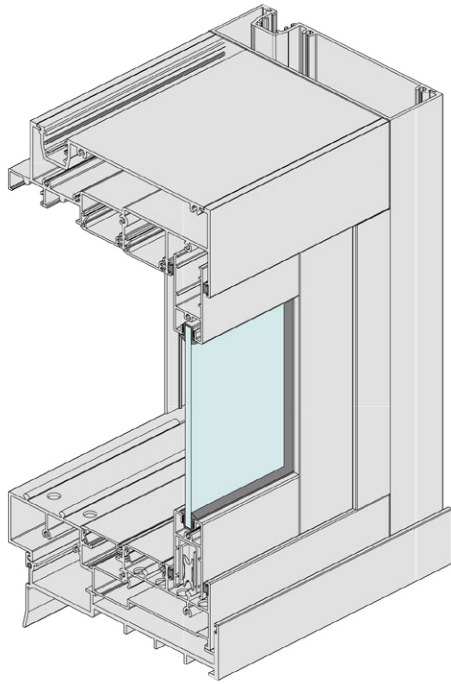


KEY FEATURES


- 150mm commercial framing to accept 26mm thick door panels.
- Available in a range of 3 panel configurations, including corner opening.
- Panels accept a variety of glass thickness from 4mm to 20mm IGUs. Dedicated sash rail and stiles for 8.38mm, 10.38mm laminated, and 20mm IGUs.
- Compatible with all CentreGLAZE™ and FrontGLAZE™ framing.
- Complies with the air-conditioning requirements of relevant Australian standards.
- Tested to 450Pa water resistance.
- Compatible with external sliding flydoors.
- Can be configured as XXF, FXX or FXXXXF.
- No visible drain holes when viewed from the inside.
- Ideal for applications requiring competitive priced sliding doors with standard moderate panel sizes.




Will accept external flydoors without the need for an applied fly door track.



Stiffening rail in sill helps to support heavy panels and ensure smooth operation and long-term durability.



Will accept external flydoors without the need for an applied fly door track.



Standard, Heavy Duty, Extra Heavy Duty and Extra Extra Heavy Duty meeting stiles available to suit high window load applications.

GENERAL

Max Frame Height*
2700mm

Max Panel Width*
1200mm

Max Glass Thickness
20mm

Frame Depth
150mm

ENERGY

UW Range
3.2-4.2

SHGC Range
0.21-0.60

WEATHER

Maximum water
450 Pa.

ACOUSTICS

12.5mm VLam Hush™
Rw37 (0;-2)



*Dimensions subject to individual site conditions.
 BAL-40 compliance may limit glass options. Maximum glass size for BAL-40 products is 4.5m2.